


LED Arts

Quad LED Controller



The LED Arts Quad LED controller is designed to run a single (or multiple if all address the same) Quad Colour (RGBW) LED light. Although a simple controller it has many useful features. Premixed colours, inbuilt programs, sound to light, strobe and the ability to mix your own colours. Great for Bands, Parties and Corporate Events.

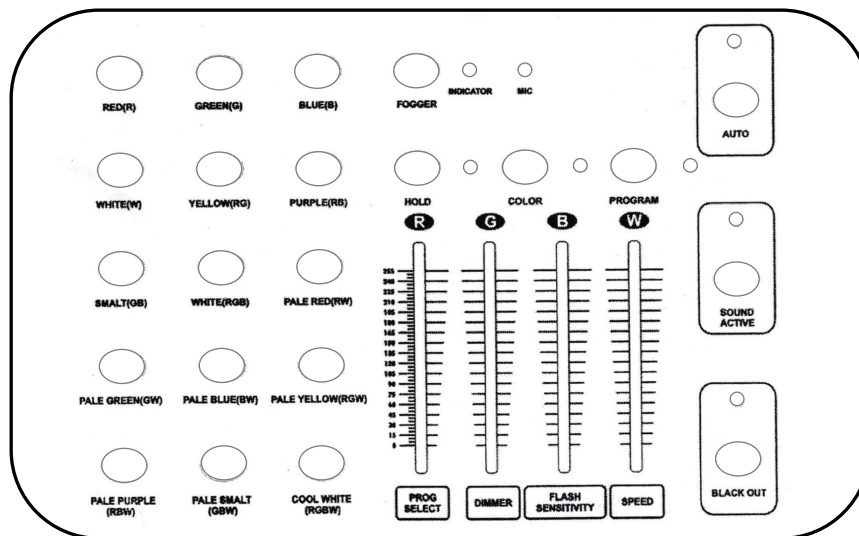

Set Light fixture:

The RGBW or RGBA colour light should be addressed to DMX 001

To then controller on:

Press "BLACK OUT" button small LED will stop flashing.

Colour select mode:

Press "COLOUR SELECT" button, the corresponding small LED is on, then press: RED(R), GREEN(G), BLUE(B), WHITE(W), YELLOW(RG), PURPLE(RB), CYAN(BG) etc.etc. to choose your preferred colour. Or you can mix your own colour by using the three RGBW(RBGA) sliders.

Built-in program mode:

Press "PROG SELECT" button, the corresponding small LED is on, then you can select the built-in programs via "PROG. SELECT" slider, the speed of the program using the "SPEED" slider and the flash rate using the "FLASH/SENSITIVITY" slider.

Auto run mode:

Press "AUTO" button, the corresponding small LED is on, then you can change the running speed via "SPEED" slider and the frequency via "FLASH/SENSITIVITY" slider. But the "PROG. SELECT" slider is not in use.

Sound Active mode:

Press "SOUND ACTIVE" button, the corresponding small LED is on, then you can change the sound sensitivity via "FLASH/SENSITIVITY" SLIDER. But the "PROG. SELECT" slider is not in use.