






LT Shadow Follow Spot

LT Follow Spot is a medium and long throw DMX controlled follow spot with very high output, ideal for theatre, concerts and large events.

Light and power supply system			
Voltage	AC220V~240V/50Hz	Average lifespan	750 hours
Power	1500w	Control	DMX 512 5 Pin
Lamp	HMI1200	Colour temp.	6000K
Colour/Pattern/Effect			
Colour	7 colour + white	Iris	Linear adjustment - DMX
CTO	3200K + 4500K + 5600K	Strobe	0 – 12 Flashes per second—DMX
Dimmer	linear adjustment - DMX	Beam angle	4 and 7.4 degrees - Manual
Focus	linear adjustment - Manual	Channels	4ch. DMX and onboard control
Construction			
IP Rating	IP20	Weight	49 Kg
Size	1715 x 445 x 235mm	Structure	Aluminium

CHANNEL	FUNCTION
1	IRIS
2	COLOUR WHEEL
3	DIMMER/STOPPER/ STROBE
4	COLOUR TEMPERATURE CONVERSION

The controls are on the dedicated panel which can be tilted downwards through an angle of 90° starting from a position on the same axis as the projector body.

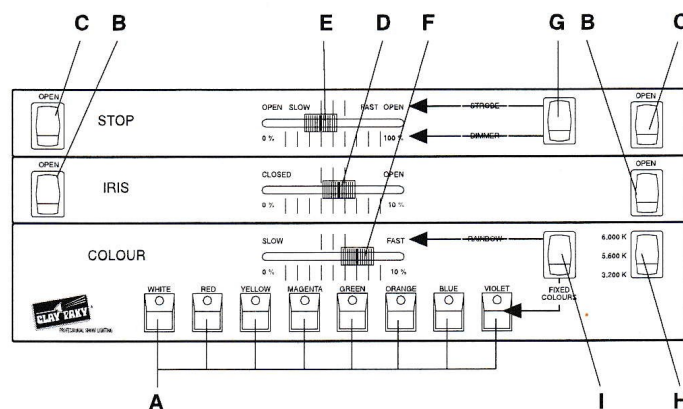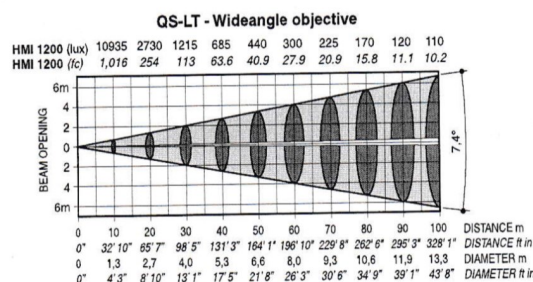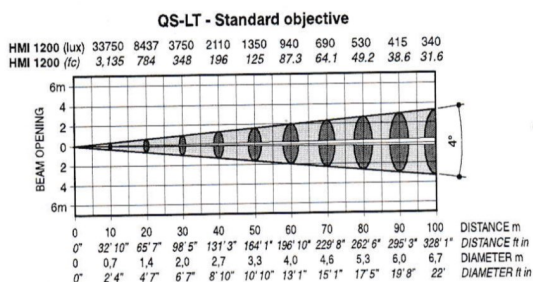

KEY

- A) 8 push buttons with indicator lights for insertion of fixed colours with two-colour beam function by pressing two adjacent buttons simultaneously;
- B) 2 flash buttons for instant iris opening;
- C) 2 flash buttons for instant stopper opening;
- D) 1 potentiometer for iris aperture adjustment;
- E) 1 potentiometer for adjusting the dimmer aperture or strobe frequency;
- F) 1 potentiometer for adjusting the rotation speed of the colour wheel (with selector I set to rainbow);
- G) 1 dimmer or strobe selector;
- H) 1 colour temperature conversion selector;
- I) 1 rainbow effect or fixed colour selector.

Suitable for 20m. to 60m. throw