



H115A

Sub speaker for live sound reinforcement, speech and vocals, music playback in entertainment, A/V, and institutional venues – especially when ease of use and portability are important factors.

Power and acoustic specifications			
Power	240v 50 Hz	Frequency response	39 Hz - 125 Hz
Output	300w	Max SPL	128dB
Coverage	90 x 60 degree	Speakers	15"woofer
In/Out connections	3 pin XLR in and out		
Physical specifications			
Case	Plastic case	Size	500 x 480 x 620mm
Weight	27.85 Kg		

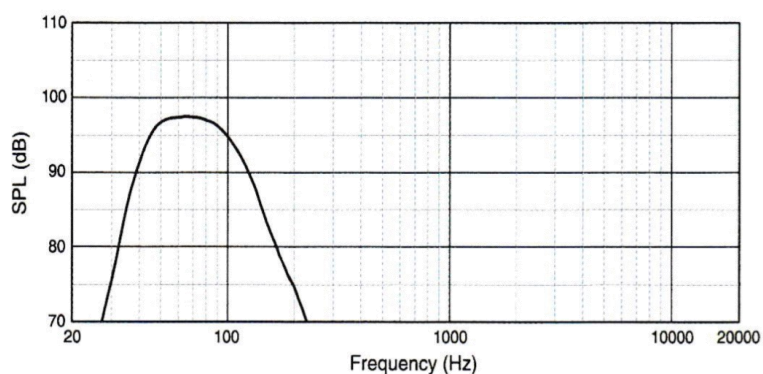


Photo of OTTO P12A and OTTO H115A