# **Product Specifications**

## SHURE<sup>®</sup> LEGENDARY PERFORMANCE<sup>™</sup>

### SM58® Cardioid Dynamic Microphone

#### Overview

The legendary SM58® is an industry-standard, highly versatile cardioid dynamic vocal microphone that is consistently the first choice of vocal performers around the globe. Even in extreme conditions, the SM58 is tailored to target the main sound source while minimizing background noise, delivering warm and clear vocal reproduction.

#### Features

- Frequency response tailored for vocals, with brightened midrange and bass rolloff
- Uniform cardioid pickup pattern isolates the main sound source and minimizes background noise
- Pneumatic shock-mount system cuts down handling noise
   Effective huilt is acharized used and filter.
- Effective, built-in spherical wind and pop filter
  Supplied with break-resistant stand adapter which rotates 180 degrees
- Supplied with bleak-resistant stand adapter which rotates 180 degree
   Legendary Shure quality, ruggedness and reliability
- Cardioid (unidirectional) dynamic
- Frequency response: 50 to 15,000 Hz

#### **Available Models**


| SM58-LC | Includes Stand Adapter and Zippered Pouch  |  |  |  |
|---------|--|--|--|--|
| SM58-CN | Includes 7.6 m (25 ft) XLR-Male to XLR-Female Cable, Swivel Adapter and a Zippered Pouch |  |  |  |
| SM58S   | Includes Integrated On/Off Switch, Swivel Adapter and a Zippered Pouch                   |  |  |  |

#### Specifications

| Туре  | Dynamic  |  |  |  |
|---|--|--|--|--|
| Frequency Response                                | 50 to 15,000 Hz  |  |  |  |
| Polar Pattern                                     | Cardioid   |  |  |  |
| Sensitivity<br>(at 1,000 Hz Open Circuit Voltage) | –54.5 dBV/Pa (1.85 mV)<br>1 Pa = 94 dB SPL   |  |  |  |
| Impedance   | Rated impedance is $150\Omega$ (300 $\Omega$ actual) for connection to microphone inputs rated low impedance |  |  |  |
| Polarity  | Positive pressure on diaphragm produces positive voltage on pin 2 with respect to pin 3.                     |  |  |  |
| Case  | Dark gray, enamel-painted, die cast metal; matte-finished, silver<br>colored, spherical steel mesh grille    |  |  |  |
| Connector   | Three-pin professional audio connector (male XLR type)   |  |  |  |
| Connector   | Three-pin professional audio connector (male XLR type)   |  |  |  |
| Net Weight  | 298 grams (10.5 oz)  |  |  |  |
| Dimensions  | 162 mm (6-3/8 in.) L x 51 mm (2 in.) W   |  |  |  |

#### **Optional Accessories and Replacement Parts**

| -     | -               |            |                 |        |                     |
|-------|-----------------|------------|-----------------|--------|---------------------|
| A58WS | Windscreen      | A55M       | Isolation Mount | C25F   | 7.6 m Cable (25 ft) |
| A25D  | Microphone Clip | A26M       | Dual Mount      | RK143G | Screen and Grille   |
| R59   | Cartridge       | S37A, S39A | Desk Stand      |        |                     |

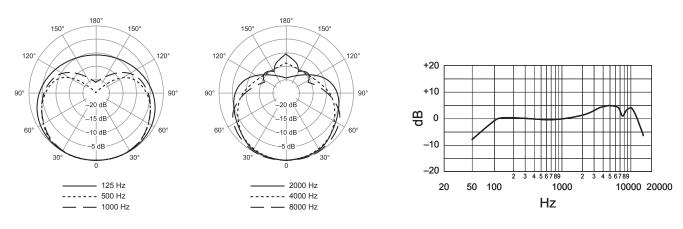

Polar Pattern





SM58

Frequency Response