


# LED Panel

Indoor P6 Panel

PROD CODE  
LA - PAP6-45IN

# LEDArts


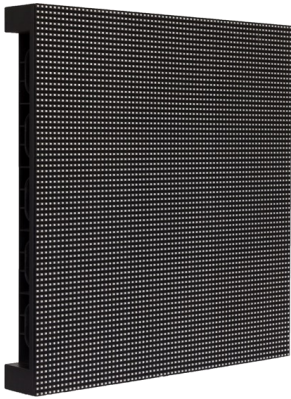


## SPECIFICATIONS

Pixel	SMD:RGB Tricol LEDs
Pixel Pitch	6.25mm
Resolution	72 Dots x 72 Dots
Refresh Frequency HZ	>1920Hz
LED Life	>100,000 hrs.
Recommended viewing distance	6 - 100mtrs
Viewing Angle ( H/V )	160° / 120°
Brightness ( cd/m2 )	1300±10%
Control System	NOVA Star
Control Options	Via Video Processor (LED SYNC 820H recommended)
Data Processor	On board Receiver Card
Data Connection	Cat5 : RJ45 Chassis Mount Connector on Data Input and Data Output
Power Connection	Neutrik PowerCON Chassis Mount Connector on Power Input and Power Output
Power	AC Power 176v - 260v 50/60Hz
Power Consumption	100watts Max. - 35watts Average.
Screen Assembly	Quick - Lock System
Dimensions	W 450mm x H 450mm x D 70mm
Weight	4.5kg
IP Rating ( Front/Back )	IP60 / IP50 - Indoor use
Approval	CE, TUV, CCC, ISO


The LEDArts range of indoor Panels offer superior design and picture quality. Our LED panels are available in a range of pixel pitches that will suit any viewing distance. The unique cabinet design not only makes this the lightest panel in the world but also gives the user the ability to create a variety of screen layouts including curved and circular screens, making this a very versatile panel indeed.

Suitable for Theatres,  
Corporate events,  
TV Stations, Schools,  
Houses of Worship  
Nightclubs, Exhibitions,  
etc.

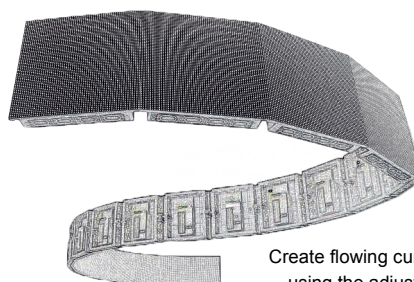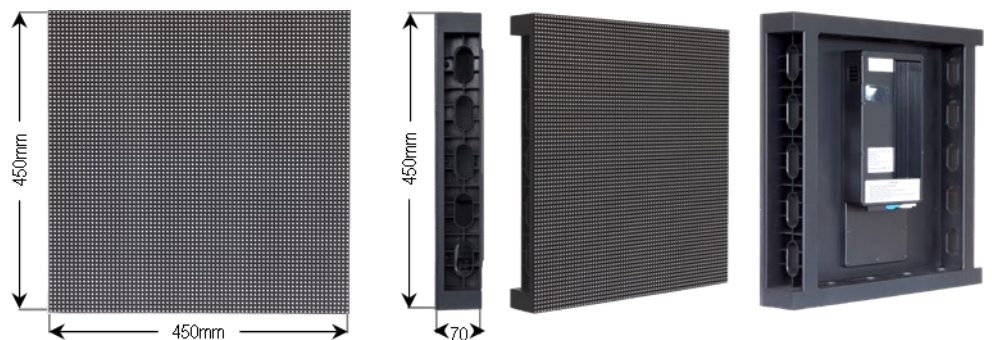


Create flowing curves by using the adjustable ±15 degree curved joiners

### Features



Quick - Lock adjustable ±15 deg. Curved Joiner



Quick - Lock Straight Joiner