




## 4 PAK-D

The Jands 4PAK-D integrates an enhanced four channel multi-scene/chaser control desk, dimmer and interconnecting cables into a single, easy to use economical unit. Additionally a DMX-512 input allows the 4Pak-D to be used as a slave dimmer from an external DMX control source.

Download manual: <https://www.jands.com.au/Documents/PDFs/Products/4PAK-D User Guide V1 software 240810.pdf>

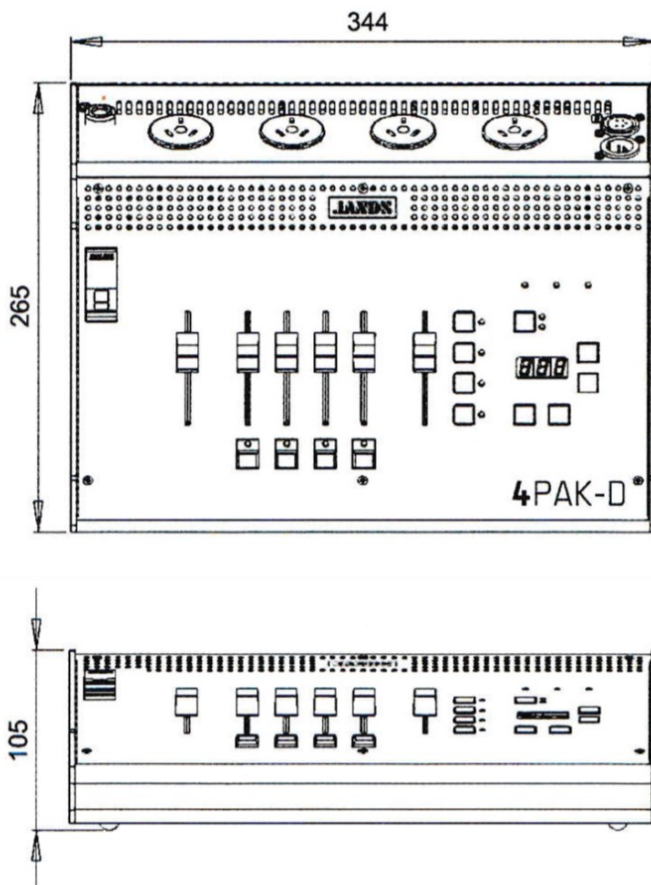

### OVERALL SPECIFICATIONS

Mains input lead	:	Captive 1.7m lead and plug
Power supply	:	230V +/-10%
Output Current	:	10A max total
Over current protection	:	One 10A Thermal-magnetic circuit breaker
Output connectors	:	1 x outlet per channel
Channels	:	4
Output rise-time	:	85µs (10-90%)
Ambient operating temperature	:	0°C min - 40°C max
Over temperature protection	:	Internal 105°C cut-out
Display	:	3 digit 7 segment LED
Faders	:	6
Buttons	:	13
User Chases	:	9
Scenes	:	20
Dimensions (mm)	:	344 x 265 x 105 (WxDxH)
Net/shipping weight	:	4.5/6 kg

