



# ETC

## Source Four®

### 15-30 Zoom Profile

There's only one Source Four - the ellipsoidal fixture that changed the lighting industry. Source Four combines the energy-saving power of the patented HPL lamp, with a dichroic reflector and optical-quality lenses, for the coolest beam on the market. That means your gels, patterns and shutters last longer and your performance space stays cooler


*Maximum brightness, maximum field-angle flexibility.* With Source Four® Zoom you only need one fixture for a variety of field angles. Plus, Source Four Zoom makes it easy: ETC's patented one-handed zoom operation makes adjustments quick, simple and safe. Technicians can focus with one hand and hold the ladder with the other.

#### Light and power supply system


Voltage	110v -240V/50-60Hz	Average lifespan	300 hours
Power	750W (max.)	Colour Temp.	3200K
Lamp	HPL 750w/240v	Gobo size	A & B

#### Appearance parameters

Structure	Aluminium	Size	270 x 200 x 600mm
IP Rate	IP20	Net weight	9.5 Kg

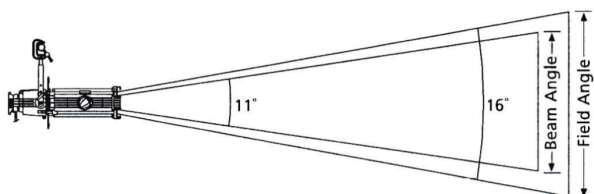

Throw Distance (d)	30'	50'	70'	90'
	9.1m	15.2m	21.3m	27.4m
Field Diameter	8.4'	14.1'	19.7'	25.3'
	2.6m	4.3m	6.0m	7.7m
Illuminance (fc)	440	158	81	49
Illuminance (lux)	4,731	1,703	869	526

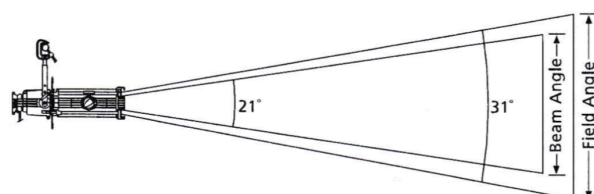

Throw Distance (d)	15'	25'	35'	45'
	4.6m	7.6m	10.7m	13.7m
Field Diameter	8.4'	14.0'	19.6'	25.2'
	2.6m	4.3m	6.0m	7.7m
Illuminance (fc)	470	169	86	52
Illuminance (lux)	5,056	1,820	929	562

